HONDA INSTALLATION INSTRUCTIONS

Accessory	Application	Publications No.
WOOD TRIM KIT P/N 08Z03-S82-100F	1999 ACCORD 2-DOOR	AII 20049
		Issue Date OCT 1998

PARTS LIST

Console cover panel

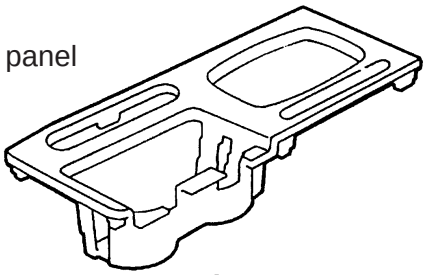

Beverage holder



Driver's side switch panel

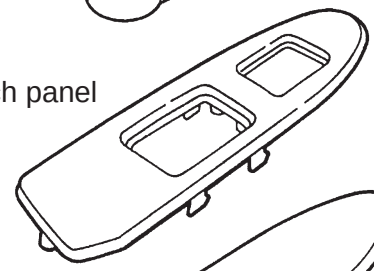

Passenger's side switch panel

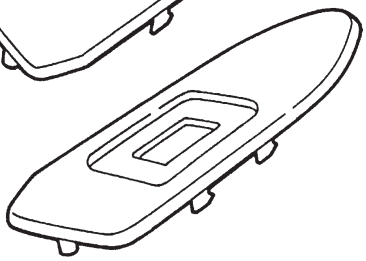

TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver
Flat-tip screwdriver
Shop towel

INSTALLATION

NOTE: The illustrations in this section show the driver's side switch panel being installed; the same procedure applies to installing the passenger's side switch panel.

1. Make sure you have the anti-theft code for the radio, then write down the frequencies for the preset buttons.
2. Disconnect the negative cable from the battery.
3. On A/T model, pry up on the four retaining tabs, and remove the trim ring. On M/T model, remove the shift knob by turning it counterclockwise.

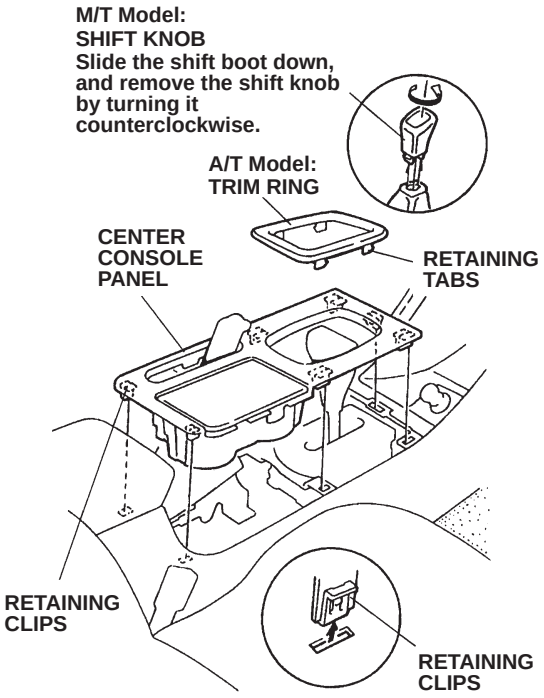

4. Remove the center console panel (seven retaining clips). Set the center console panel aside; it will not be reused.
5. On M/T model, transfer the shift boot to the new wood center console.

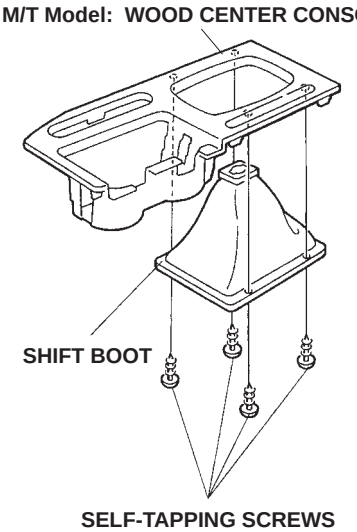

© 1998 American Honda Motor Co., Inc. – All Rights Reserved

6. Install the wood center console panel, then install the wood beverage holder.
7. On A/T model, reinstall the trim ring. On M/T model, reinstall the shift knob.

Installing the Wood Switch Panels

8. Remove the door panel:
   - Remove the mirror mount cover (two retaining clips and one tab).

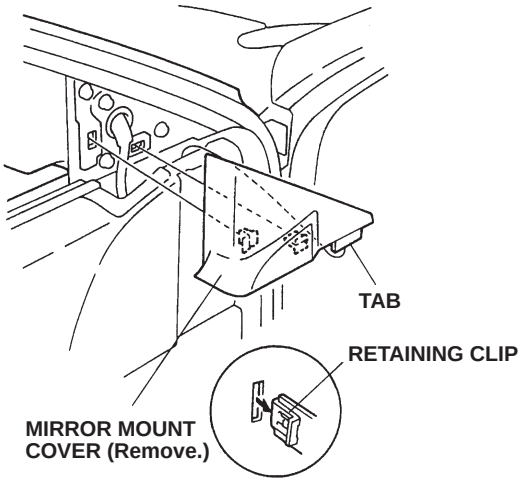

   - Open the screw cover concealing the self-tapping screw, and remove the screw.

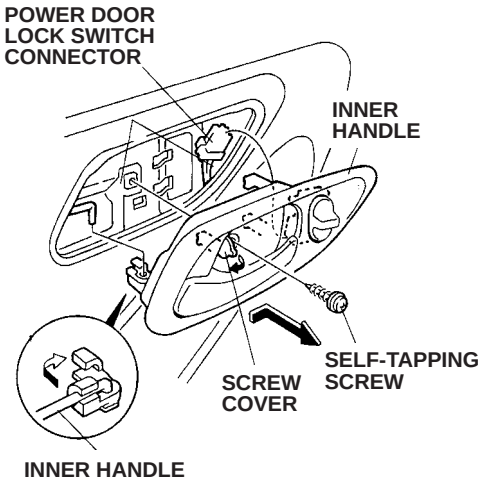

   - Slide the inner handle forward, and pull it halfway out. Disconnect the inner handle rod and the power door lock switch connector; then remove the inner handle.
   - Remove the one self-tapping screw from the pull pocket, then remove the pin clip from the front of the door panel.

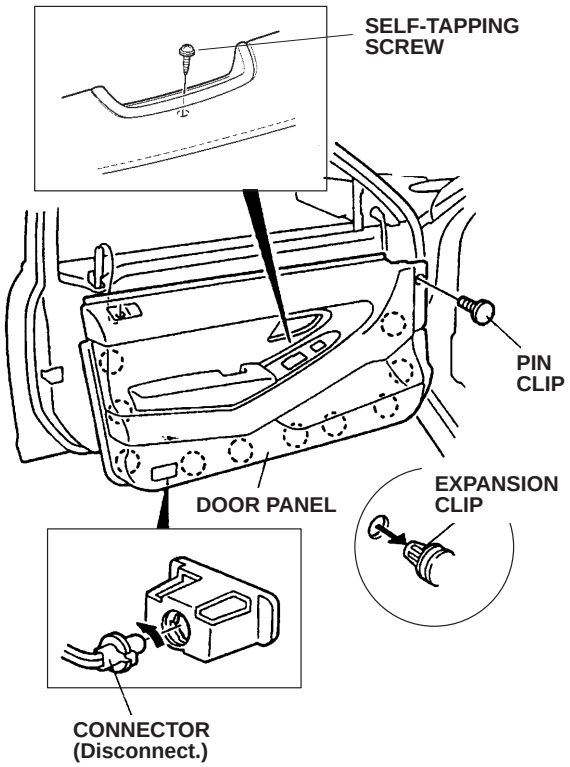

   - Remove the ten expansion clips, disconnect the connectors, and lift upward on the door panel.

9. On the inside of the door panel, remove the seven screws securing the armrest. Remove the armrest.

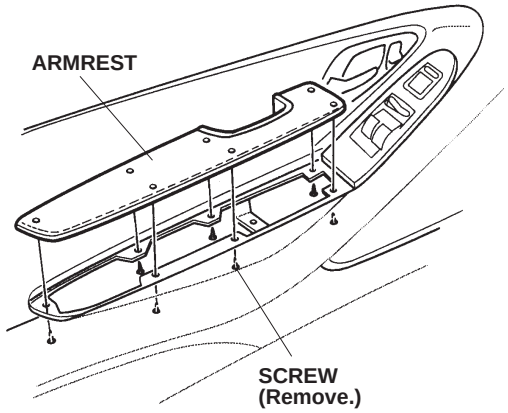

AII 20049 (9810)
© 1998 American Honda Motor Co., Inc. – All Rights Reserved

10. Inside the door panel, remove the two self-tapping screws securing the switch panel.

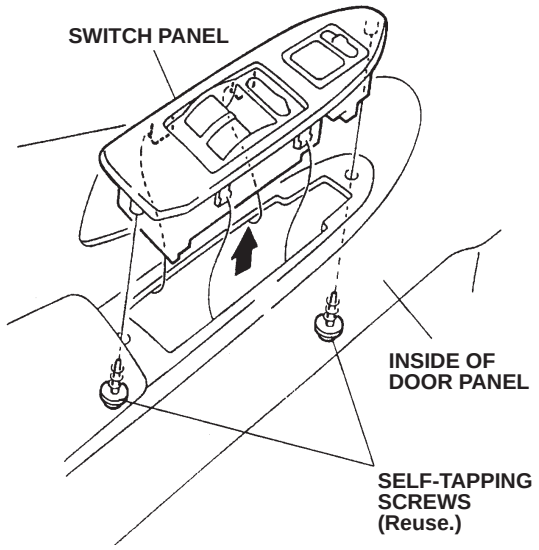

11. Transfer the power window switch to the driver's side wood switch panel.

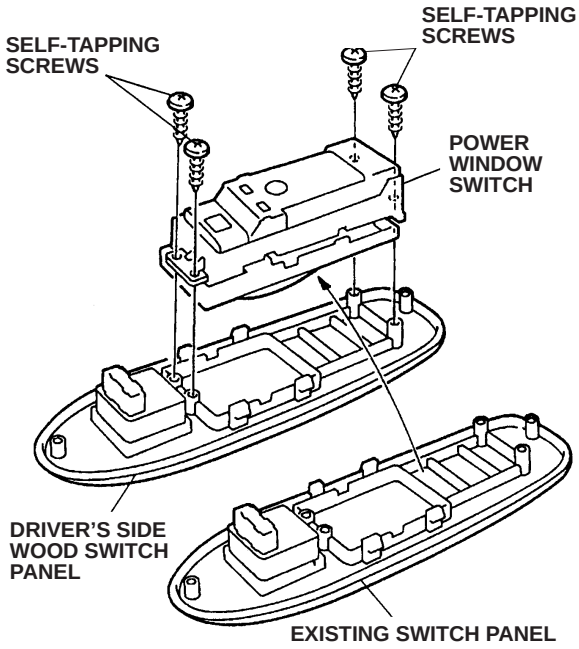

12. Transfer the door mirror switch to the driver's side wood switch panel.

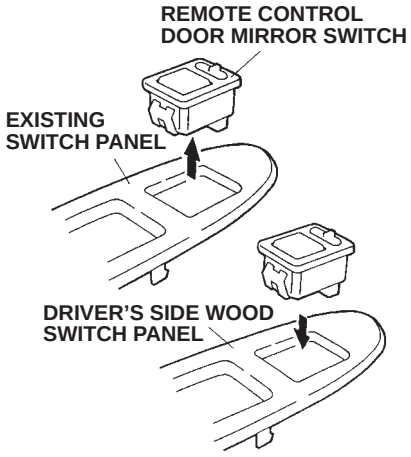

13. Install the driver's side wood switch panel.

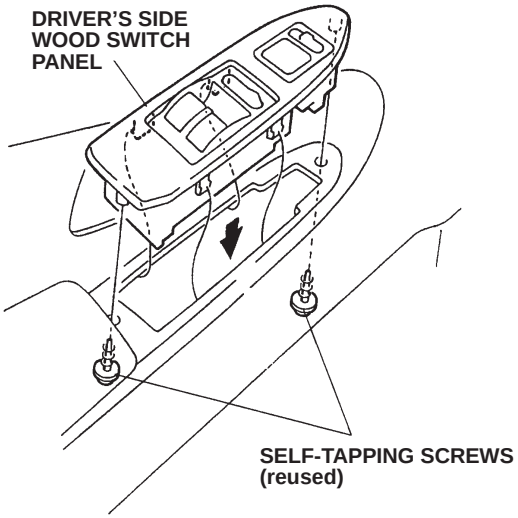

14. Reinstall the door panel.
15. Repeat steps 8 through 14 to install the passenger's side wood switch panel.
16. Reconnect the negative cable to the battery.
17. Enter the customer's radio anti-theft code, and reset the radio station presets.
18. Reset the clock.

© 1998 American Honda Motor Co., Inc. – All Rights Reserved